RFP 21-1 Internal Wiring Addendum 1

Pre-Proposal Conference (Feb. 25,2021)
Record of attendance:

Fern Ridge School District 28J
Network Internal Wiring Project
RFP 21-1
Mandatory Pre-Proposal Conference

Thursday / 02/25/21 ###
Fern Ridge School District Office
88834 Territorial Rd, Elmira, OR 97437

RECORD OF ATTENDANCE

Name	Representing	e-mail	Phone
Rick Oakes	Certified Systems	RickeCSIOR.com	541-337-7535
Darin Housley	NNSOI	darin.housley@nnsoregon.com	541-726-9209
Matt Wolfe	DEG	Matthew.Wolfe@oeg.us.com	541-335-9237

Pre-proposal Meeting Clarifications

Q: Does jack color have to match cable color?
A: Yes, at panel and at wall.

Q: RFP, section I. 3. states “No proposal may be withdrawn for a period of sixty (90) days after the date set for the submission of the proposals.” - Which is the intended duration.
A: Ninety (90) days.

Q: What is the allowed project duration?
A: Project must start on or after July 1st, and be completed by Aug 6th.

Q: Will project work be limited to regular working hours, or would swing-shift work be allowed.
A: For the purposes of the bid, all work should be considered limited to regular business hours -7:30 - 4PM. If project work is required and agreed to by the district outside those hours, any overage or over-time costs would be paid by the contractor and the bid rate would apply.

Q: There is some inter-building conduit – what are the contingencies if those pathways are full?
A: For the purposes of this bid, pricing should be based on using existing pathways.

Q: In locations with drop ceilings, the “wall drops” might be similarly functional with ceiling mounted panels. Is this an acceptable option in those locations?
A: Generally, yes. Placement must be coordinated with owner, and owner determines suitability of ceiling mounted panel vs. wall mounted box at location.

Q: What prevailing wage schedule should we use to comply with section IV. 30 of the RFP?
A: The current prevailing wage rate schedule at time of bid.

Revision / Clarification notes for RFP 21-1 Internal Wiring

Revisions:

- **Section I. 3.** Replace “sixty (90)” with “ninety (90)”

Revision notes for RFP 21-1 Internal Wiring Attachment B
(Room Numbers added to document for clarity)

Drawing Change notes:

Symbols Revision:

- Clarify WAP cabling is CAT6A in Symbol Definitions

Change From:



TO:



Room 16 Revision:

Move Wall Location from S. wall to N. Wall

Room 32 Revision:

Remove Wall Location

Room 33 Revision:

Remove Wall Location

ELMIRA HIGH SCHOOL
WIRING PLAN -Addendum 1

General Notes:
A. Bids are to include "per drop" (drop = 2 cables) quotes, number of drops is scaleable by owner. Full job only bids will be disqualified.

B.Locations are approximate. Coordinate all final locations with owner prior to installation.

Symbols:

WAP(Ceiling) location. Provide 2 Cat 6A cables (purple), field terminated per location.
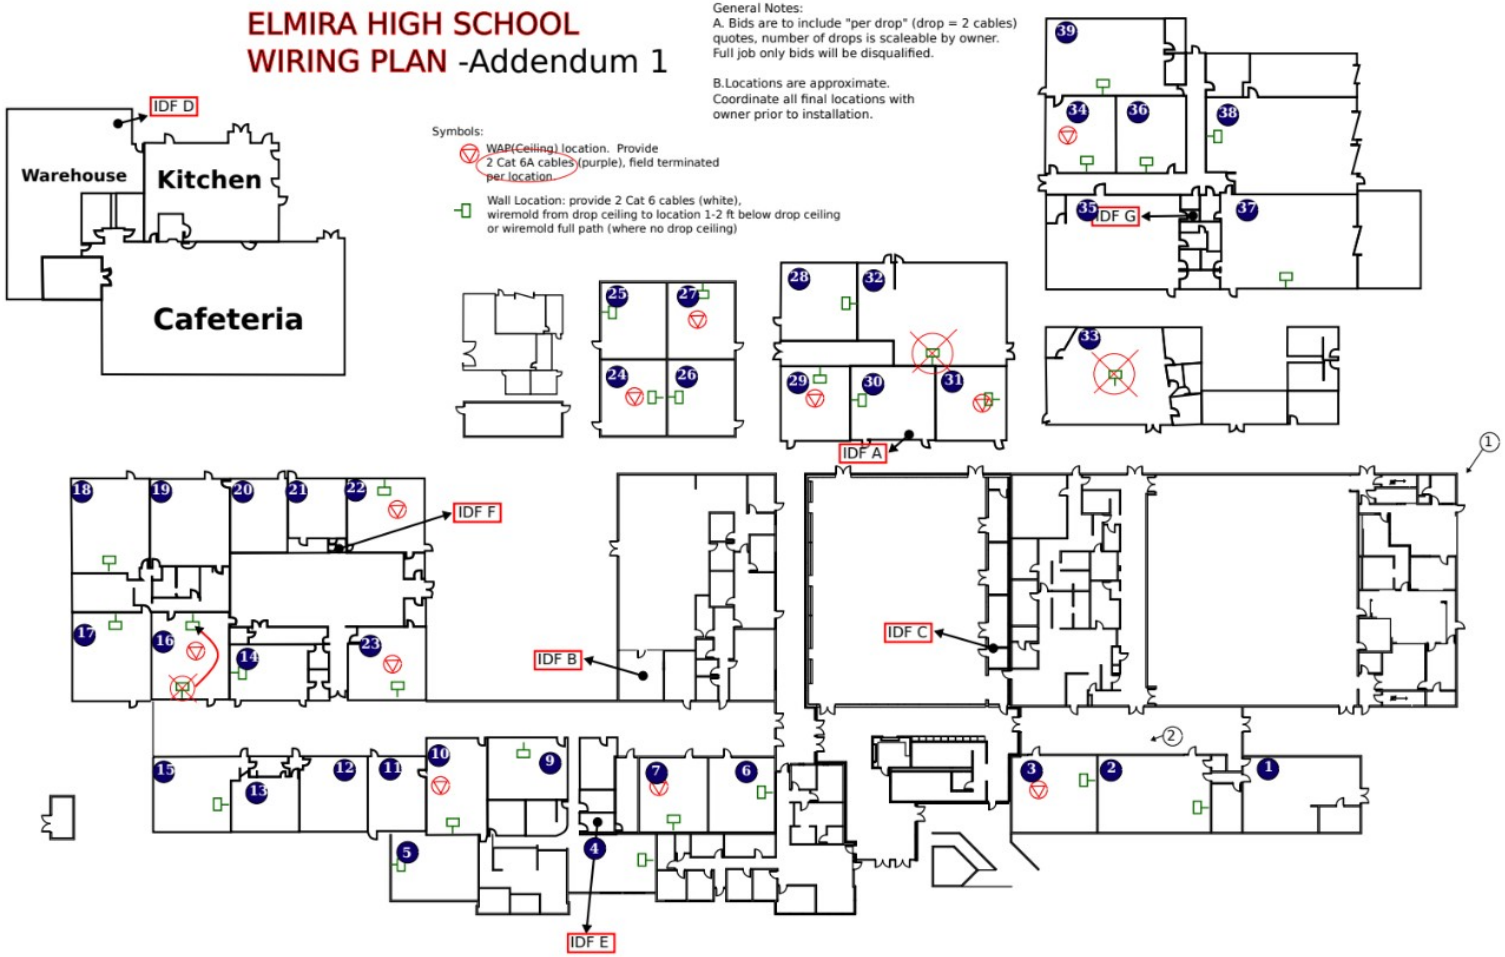
Wall Location: provide 2 Cat 6 cables (white), wiremold from drop ceiling to location 1-2 ft below drop ceiling or wiremold full path (where no drop ceiling)